



Contact Us:
Bishnu Khoala
9932450129
Komal Khoala
9916814583
Rahul Khoala
9932287747

G.T. Road, Kultora,
Opp. Reliance Petrol Pump
P.O.: Kulti, District: Burdwan
(West Bengal): 713343
embassy2001@rediffmail.com













It is our privilege to present you, the most beautiful and durable product for your outer and inner application. Our long business association with the industry has helped us to make perfect concrete mix. We have tried to maintain the quality of the product through vigorous research, marketing feedback and in-house testing at out own lab. We assure you that all available international or indigenous branded product are used in marketing of Eco bricks & pavers for its durability & style.




Product Profile

Eco Bricks an ISO 9001:2015 Certified Company in Kulti, having most modern manufacturing facility for designer concrete tiles & pavers for wall, floor. Eco Bricks uses the expertise of qualified personal in making of these tiles, pavers, Blocks & Bricks which helps in drafting a appropriate mix design as per the requirement of the customer & need of the project. Eco Bricks are manufactured in various traditional & contemporary design & various natural & vibrant colors to suit the taste of every customer. Eco Bricks can be applied at any outer & inner area irrespective of rough & tough application. It will provide beauty with durability.

Fly-ash Brick Eco BRICK



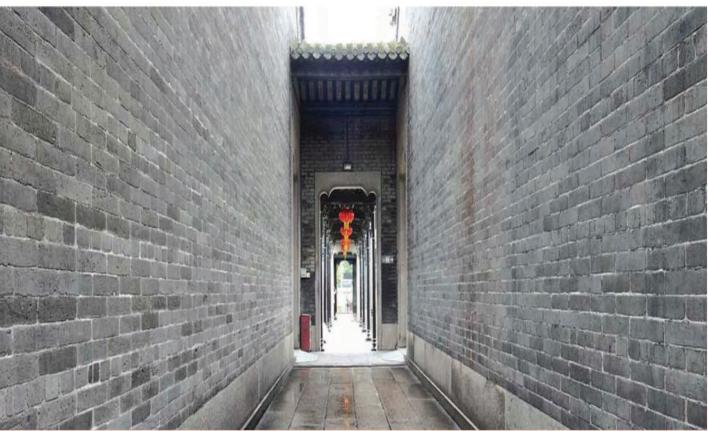

ADVANTAGES:

- Higher compressive strength
- Lower cost per unit of construction
- High durability
- Less cement mortar consumption
- Lighter in weight

APPLICATION:

- Interior and exterior of building
- Foundation
- Garden walls and boundaries
- Pavement
- Steps



Length (mm)	width (mm)	height (mm)	Strength(N/mm₂ or mpa)
230	110	75	~7 -7.5
110	90	90	~7-7.5
250	120	75	~7-7.5





ADVANTAGE

- REDUCED CONSTRUCTION COST
- DURABLE
- ENERGY SAVER
- DESIGN FLEXIBILITY
- HIGH STRENGTH
- ZERO BREAKAGES
- REDUCED MAINTENANCE COSTS
- SUPERIOR FINISH

APPLICATIONS:

- INTERNAL PARTITION WALLS
- FOUNDATION
- GARDEN WALL & PLANTERS
- RETAINING WALL
- STEPS
- SOLID PATIO
- ACOUSTIC SEPARATING PARTY WALLS
- INNER& OUTER LEAF OF EXTERNAL CAVITY WALLS OVER 3 STORIED



SIZE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	STRENGTH (N/mm2)	WEIGHT (Kg)
4"	400	100	200	5-7.5	16
6"	400	150	200	5-7.5	24
8"	400	200	200	5-7.5	34




ADVANTAGE:

- HIGHLY DURABLE
- GOOD RESISTENSE TO FIRE
- LOW MAINTENANCE
- THERMAL & SOUND INSULATION
- ENVIRONMENT AL FRINDLY
- COST SAVING OF UPTO 40%

APPLICATIONS:

- THEN OFTEN COVERED WITH STUCCO
- EXTERIOR WALLS USUALLY PLAIN FACED
- FOUNDATION WALLS TYPICALLY ROCK FACED
- MOST CONCRETE HOLLOW BLOCKS ARE **USED AS**
- BASEMENT WALLS /PARTITION USUALLY **PLAINFACED**
- A BACK-UP MATERIAL OR FOR CAVITY WALL CONSTRUCTION

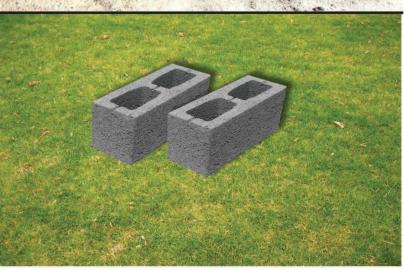

SIZE	LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)	STRENGTH (N/mm2)	WEIGHT (Kg)
4"	400	100	200	3.5 – 7.5	11
6"	400	125	200	3.5 – 7.5	13.5
8"	400	150	200	3.5 – 7.5	21



| Floor Tiles

Floor Tiles |

ECO BRICK WAVES

Application

Parking Bay,

Goverment

Buildings,

Driveways.

Malls,

Application

Driveways, Swimming Deck, Malls, Railway Platform, Parking Bay.



area/tile: 1.722 sq ft







area/tile: 1.00 sq ft

Rock THICKNESS 22 mm, 25mm










Application

Parking Bay, Driveway, Swimming Deck, Malls, Institutional Buildings.



area/tile: 2.19 sq ft








THICKNESS | Kelvin & Kox

Application

Residential Complex, Malls, Industrial Building, Parking Bay.






| Floor Tiles

Floor Tiles



Application

Farm House, Driveways, Malls, Parking Bay, Footways.



area/tile: 0.61 sq ft



Honney Comb THICKNESS 22 mm, 25mm





















Application

Swimming Deck, Driveways, Malls, Railway Platform, Parking Bay.



area/tile: 0.50 sq ft

Application

Driveways,

Parking Bay,

Terrace.

Railway Platform,

Garden,

Malls,

Application

Shopping Malls, Residential Project, Parking Bay, Driveways.





area/tile: 0.1 sq ft



area/tile: 1.00 sq ft



Cube Angle | THICKNESS 22 mm, 25mm























THICKNESS 22 mm, 25mm Bonney





Floor Tiles

Akash THICKNESS 22 mm, 25mm

Pavers



Application

Driveways, Swimming Deck, Malls, Residential Complex, Parking Bay.



area/tile: 0.35 sq ft









Application

Light Motor All Road, Walkways, Pavement, Complex, Industrial Floor, Etc.



area/tile: 0.472 sq ft

Application

Terrace, Driveways, Swimming Deck, Malls, Commercial Establish Mall, Parking Bay.



area/tile: 1.15 sq ft



Scorpio | THICKNESS 25mm, 30 mm





















THICKNESS I Zig Zag

Application

Heavy Traffic Area, Walkways, Pavement, Complex, Industrial Floor, Airports Area,



area/tile: 0.35 sq ft



Pavers

Pavers



Application

Footways,

Walkways,

Pavement,

Etc.

Public Buildings,

Industrial Floor,

Application

Pathways, Walkways, Public Buildings, Industrial Floor, Etc.









area/tile: 0.54 sq ft

THICKNESS Arch 40 mm, 60mm, 80mm, 100mm









Application

Driveways, Walkways, Pavement, Residential Complex, Industrial Floor, Etc.





Floric | THICKNESS 40 mm, 60mm, 80mm, 100mm







THICKNESS 40 mm, 60mm, 80mm, 100mm Tri Arc

Application

Parking Area, Walkways, Pavement, Complex, Industrial Floor, Etc.



area/tile: 0.44 sq ft



Manganese and steel casting

We are engaged in manufacturing of wide range of manganese and steel casting that finds usage in various industrial applications.

Products manufactured:

- 1. Jaw plate
- 2.Side plate
- 3. Hexagon and Square steel casting
- 4.Liner

ADVANTAGES:

- 1. High ductility
- 2. Corrosion Resistant
- 3. High Tensile strength
- 4. High Durability

APPLICATION:

Construction –for crushing and grinding stones Mining -to fragment rocks

Tunnel work

Other industrial work













Our Esteemed Customer

































